


Eaton C22M125

Catalog Number: C22M125

Eaton Bussmann series low voltage 22 x 58 mm cylindrical/ferrule fuse, rated at 400 Volts AC, 125 Amps, 120 kA Breaking capacity, class aM, without indicator, compatible with a CH22 Modular fuse holder

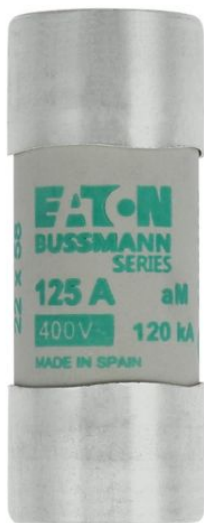

General specifications

Product Name	Catalog Number
Eaton Bussmann series low voltage cylindrical fuse	C22M125
	UPC
	051712589949
EAN	Product Length/Depth
5027590495677	58 mm
Product Height	Product Width
22.2 mm	22.2 mm
Product Weight	Warranty
55.9 g	1 year limited
Compliances	Certifications
CE Marked	IEC 60269
GoST-R	
RoHS Compliant	

Electrical data

Amperage Rating

125 A

Voltage rating

400 V

Voltage type

AC

Breaking capacity

120 kA

Utilization category

aM (switchgear protection)

Frequency rating - max

62 Hz

Compatible fuse holder

Suitable for

CH22 Modular fuse holder

Resources

Catalogs

[CA134002EN](#)

[eaton-product-overview-for-machinery-catalogue-ca08103003zen-en-us.pdf](#)

[Bussmann series complete full line catalog no. 1007](#)

Compliance information

[UKCA C08G, C08M, etc cylindrical fuselinks](#)

[CE C08G, C08M, etc cylindrical fuselinks](#)

Technical data sheets

[720115 Cylindrical fuses](#)



Eaton Corporation plc
Eaton House
30 Pembroke Road
Dublin 4, Ireland
[Eaton.com](#)

© 2024 Eaton. All Rights Reserved.

Eaton is a registered trademark.

All other trademarks are property of their respective owners.



[Eaton.com/socialmedia](#)